



Septic Tanks



Robust

Eliminates damage during installation or pumping operations

Flexible

Compatible with all onsite systems
Integrated effluent filter




MODELS	PST-280	PST-340	PST-390	PST-440	PST-500	PST-660	PHT-390	PHT-660
Description	Septic tank with effluent filter (basic model includes a Polylok™ PL-122 effluent filter)						Holding Tank**	
Item number	123143	120789	120989	194391	120990	121710	187233	187234
Number of bedrooms	2	3	4	5	6	6	Yearround occupancy	
							1 and 2	3 to 6
							Seasonal occupancy	
							1 to 4	5 and 6
Total nominal capacity	2 800 L	3 400 L	3 900 L	4 400 L	5 000 L	6 650 L	3 900 L	6 650 L
	620 UK gal	750 UK gal	860 UK gal	965 UK gal	1 100 UK gal	1 460 UK gal	860 UK gal	1 460 UK gal
	740 US gal	900 US gal	1 030 US gal	1 160 US gal	1 320 US gal	1 760 US gal	1 030 US gal	1 760 US gal
Liquid capacity	2 260 L	3 000 L	3 300 L	3 700 L	4 300 L	5 800 L	3 450 L	5 900 L
	500 UK gal	660 UK gal	730 UK gal	810 UK gal	950 UK gal	1 280 UK gal	755 UK gal	1 300 UK gal
	600 US gal	800 US gal	880 US gal	975 US gal	1 140 US gal	1 530 US gal	910 US gal	1 550 US gal
Total length (A)	2 495 mm 98"	3 035 mm 119 1/2"	3 320 mm 130 1/2"	3 777 mm 148 3/4"	3 220 mm 126 3/4"	3 965 mm 156"	3 320 mm 130 1/2"	3 965 mm 156"
Total width (B)	1 250 mm 49 1/4"	1 250 mm 49 1/4"	1 250 mm 49 1/4"	1 250 mm 49 1/4"	1 250 mm 49 1/4"	1 330 mm 52 3/8"	1 250 mm 49 1/4"	1 330 mm 52 3/8"
Total height (C)	1 330 mm 52 3/8"	1 330 mm 52 3/8"	1 330 mm 52 3/8"	1 330 mm 52 3/8"	1 730 mm 68 1/8"	1 720 mm 67 3/4"	1 330 mm 52 3/8"	1 720 mm 67 3/4"
Inlet height (D)	1 055 mm 41 1/2"	1 055 mm 41 1/2"	1 055 mm 41 1/2"	1 055 mm 41 1/2"	1 430 mm 56 1/4"	1 400 mm 55"	1 055 mm 41 1/2"	1 400 mm 55"
Outlet height (E)	980 mm 38 1/2"	980 mm 38 1/2"	980 mm 38 1/2"	980 mm 38 1/2"	1 330 mm 52 3/8"	1 320 mm 52"	—	—
Diameter of openings (F)	470 mm 18 1/2"	470 mm 18 1/2"	470 mm 18 1/2"	470 mm 18 1/2"	470 mm 18 1/2"	470 mm 18 1/2"	470 mm 18 1/2"	470 mm 18 1/2"
Weight*	160 kg 353 lb	180 kg 397 lb	190 kg 3419 lb	210 kg 463 lb	265 kg 584 lb	325 kg 717 lb	210 kg 463 lb	350 kg 772 lb
Certifications								

Accredited according to the BNQ 3680-905 standard

Accredited according to the NQ 3682-901 standard

**Accredited by Health Products and Food Branch (Health Canada) for some application

*Weights indicated are approximate and not binding. For handling and lifting purposes only.

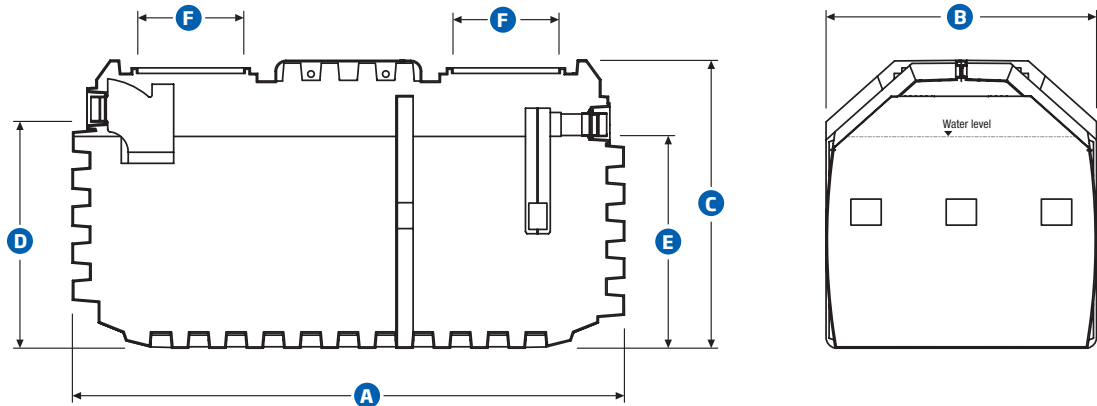

IT'S ALL YOU NEED!
Register
The toolbox for
wastewater professionals



1 800 632-6356
 418 862-6642
pta@premiertech.com
PREMIERTECHAQUA.COM

The Strength of Premier Tech Aqua

- Over 55,000 Ecoflo® installations
- Over 100,000 peripheral products sold
- Over 950 commercial, community, institutional, municipal and industrial installations
- Documented system traceability, inspection, maintenance and follow-up
- More than 2,500 partners
- Team of 25 experts entirely dedicated to IR&D
- Presence in North America, Europe and Asia
- Treatment performance surpassing regulatory requirements

The information contained in this document is based upon the latest information available at the time of publication and is designed to provide you with a general introduction to our products. We make no warranties or representations as to its accuracy. We are continually updating and improving our products and reserve the right to amend, discontinue, alter or change specifications and prices without prior notice.

© Premier Tech Ltd, 2012

Printed in Canada